

Raychem GM-TA

DIN RAIL MOUNTABLE THERMOSTAT FOR ROOF & GUTTER DE-ICING AND SNOW MELTING HEATING CABLES



PRODUCT OVERVIEW

The GM-TA thermostat is designed for operation with Raychem Roof & Gutter Snow melting & De-icing system for small gutter lengths up to 30 m.

It is an electronical thermostat with double temperature setpoint.

It is compatible with Raychem self-regulating heating cable


- GM-2X
- GM-2XT
- Frostop-Black
- Or Raychem Constant Wattage heating cable GM-2CW

PRODUCT FEATURES

- Electronical temperature control with ambient temperature sensor (sensor for outdoor installation)
- DIN-Rail mountable (35 mm) for panel installation
- Easy-to-read digital display for temperature and alarm
- Double temperature set points
- Post heating time from 30 min up to 3 hours selectable
- Read-out of actual ambient temperature

GM-TA THERMOSTAT

DISPLAY



A-LED Display (Temperature and Alarm)

B-Heating system ON

C-Increase value (change of temperature)

D-Reduce value (change of temperatures)

E-Program mode selection ON/OFF and parameter settings

TECHNICAL DATA

Supply voltage	230 Vac, +10%/-10%, 50 Hz
Relay output heating cable	230 Vac, max 16 A
Relay output alarm	230 Vac, max 8 A, switch-over contact, potential-free
Power consumption	max. 5 VA
Terminal size	2,5 mm ² , screwed
Parameter settings	Programmable in non-volatile memory
Storage temperature	-20°C to +50°C
Switching hysteresis	+/-1K
Ambient temperature-range operation	-25°C to +40°C
Accuracy	+/- 1,5 K including temperature probe

PROGRAMMABLE PARAMETER

DEFAULT FACTORY SETTINGS

2 temperature setpoints	Range I: 0°C to +6°C, editable Range II: -25°C to -5°C	2°C Default value -10°C
Post heating time	0 to 3 hours	0,5 hours
Sensor adjustment	-10 K to +10 K;	0

ERROR MESSAGES BY MONITORING

Sensor	Sensor short circuit Sensor open loop
--------	--

HOUSING

Color	Black with red front
Dimensions	52,5 mm x 87, 5 mm x 58 mm (H/W/D)
Material	ABS
IP rating	IP 20 (IP 30 in panel)
Installation	DIN rail mountable 35 mm
Minimum installation temperature	5°C

TEMPERATURE SENSOR

Type	Sensor type 202AT +/-1% NTC 2 KOhm@25°C
Enclosure material	Polycarbonate
IP rating	IP 65
Enclosure dimensions	Width: 50 mm; Depth: 26 mm, length 52 mm
Cable diameter	4 mm
Exposure temperature	-30°C to +40°C
Accuracy	+/-1 K

APPROVALS

CE;
RoHS & REACH

SYSTEM INFORMATION

Raychem GM-TA thermostat is designed for use with Heating cables GM-2X(T), Frostop - Black , GM-2CW. Maximum circuit length is limited to 30 m.

ORDERING INFORMATION

Product: GM-TA
PCN: 1244-017783

ACCESSORIES




Spare part: sensor type 202AT +/-1% NTC 2K0hm@25°C, PCN 1244-017965



GM-TA-OUTDOOR Box (PCN: 1244-017966) Plastic enclosure for outdoor-installation of GM-TA Thermostat for roof & gutter application

ELECTRICAL SCHEME

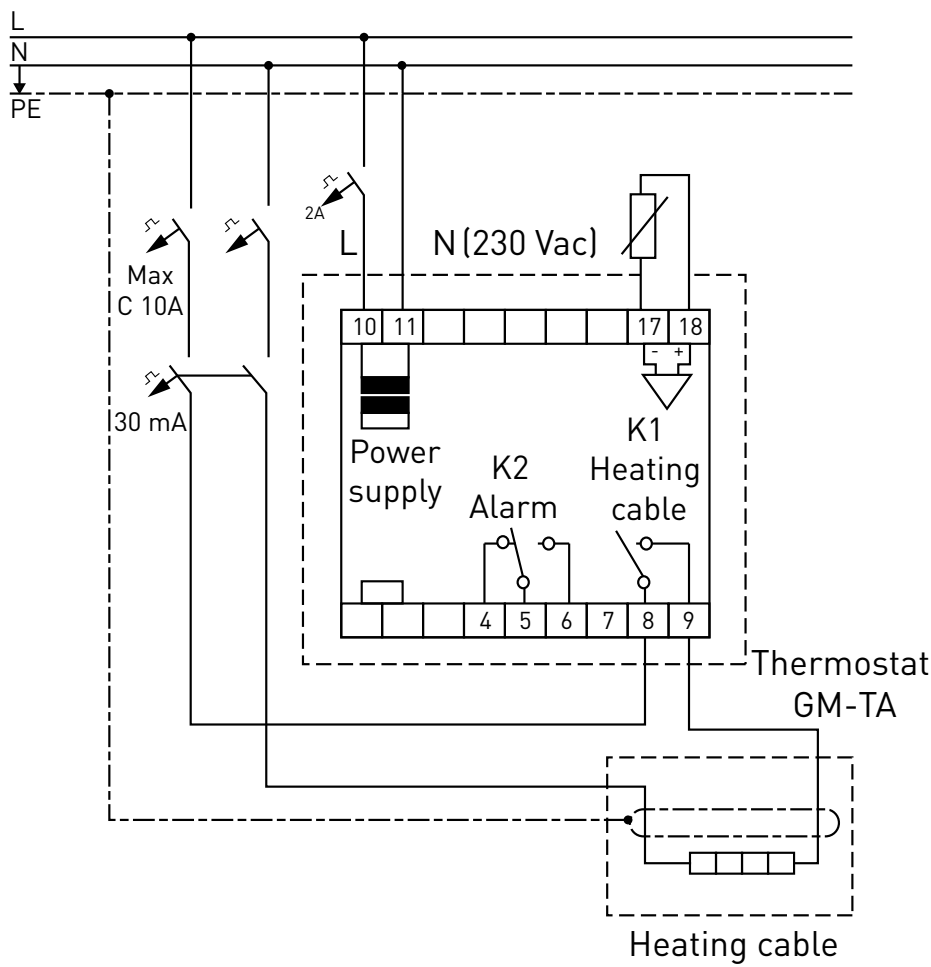



WWW.PENTAIRTHERMAL.COM

UNITED KINGDOM

Tel: 0800 969 013
Fax: 0800 968 624
salesthermaluk@pentair.com

IRELAND

Tel: 1800 654 241
Fax: 1800 654 240
salesIE@pentair.com

SOUTH EAST ASIA

Tel: +65 67685800
Fax: +65 67322263

AUSTRALIA

Tel: +61 2 97920250
Fax: +61 2 97745931
ausalesthermal@pentair.com

INDIA - NOIDA

Tel: +91 120 464 9500
Fax: +91 120 464 9548
PTMinfome@pentair.com

INDIA - MUMBAI

Tel: +91 22 6775 8800/01
Fax: +91 22 2556 1491
PTMinfome@pentair.com

UAE

Tel: +971 4 378 1700
Fax: +971 4 378 1777
PTMinfome@pentair.com

Pentair is owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2016 Pentair.

@pentairTBS