


Raychem HWAT- L-M-R

SELF-REGULATING HEATING CABLES FOR HOT WATER TEMPERATURE MAINTENANCE

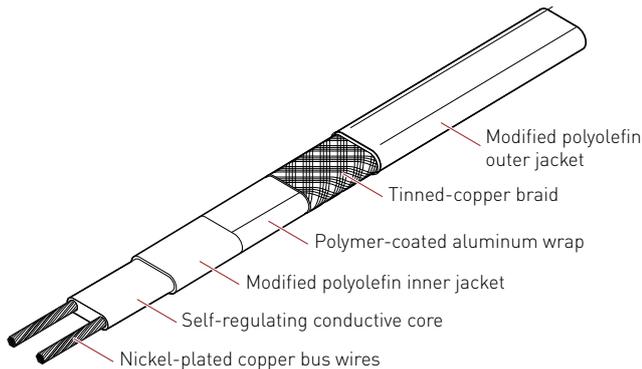

The HWAT self-regulating heating cables maintain the desired water temperature in a building's hot water distribution pipe network.

Positioned on the pipe underneath the insulation, the cables automatically compensate for pipe heat losses where they occur, thereby providing continuous, energy efficient, hot water temperature maintenance.

The HWAT system can be used to eliminate the re-circulation system altogether or to help optimise its performance, in a hybrid approach.

In a hybrid system, recirculation loops are used on the long central pipe runs, with HWAT cables installed on all branch run outs.

Either way, a much improved solution when compared to re-circulation systems.

KEY BENEFITS

HWAT SYSTEM

- Improves delivery of instant hot water at the tap, compared to re-circulation systems
- Environmentally friendly, with significant energy and water savings
- Simple to design and flexible, quick and easy to install
- No need for return pipe work, re-circulation pumps, balancing valves or complex commissioning
- Effective operation, less maintenance, improved hygiene
- Prevention of bacterial proliferation, with
 - Water maintained at a specific temperature level
 - No return pipework and no return of cool water into the water heater
 - Thermal shock capability (HWAT R only)
- Advanced control & monitoring, maximum energy savings
- Space saving
- Well established, worldwide

HWAT SELF REGULATING CABLES

- Pentair has more than 40 years experience in producing self-regulating heating cables and is ISO-9001 registered
- Designed and qualified specifically for use on hot water systems
- Tested and approved to IEC 62395 and IEEE 515.1
- Energy efficient
- Radiation cross-linked, to ensure long life expectancy
- Proven useful lifetime in excess of 40 years
- 10 year warranty
- Complete range for all building types :
 - HWAT-L for smaller projects (single family houses, flats)
 - HWAT-M for apartments and offices
 - HWAT-R for hotels, hospitals, convalescent homes
- Aluminum foil layer to protect the self-regulating core from chemical ingress

TECHNICAL DATA

	HWAT-L	HWAT-M	HWAT-R
PCN	258015-000	498639-000	266435-000

CONSTRUCTION

Inner/outer jacket	Modified polyolefin	Modified polyolefin	Modified polyolefin
Outer jacket colour	Yellow	Orange	Red
Braid	Tinned copper	Tinned copper	Tinned copper
Aluminium foil layer	Yes	Yes	Yes
Bus wires	16 AWG nickel-plated copper	16 AWG nickel-plated copper	16 AWG nickel-plated copper

PRODUCT DIMENSIONS AND WEIGHT (NOMINAL)

Max. dimensions	13.8 x 6.8	13.7 x 7.6	16.1 x 6.7
Weight	0.12 kg/m	0.12 kg/m	0.14 kg/m

SPECIFICATIONS

Nominal voltage	230 VAC	230 VAC	230 VAC
Nominal power output	7W/m @ 45°C	9 W/m @ 55°C	12 W/m @ 70°C
Maximum circuit length	180 m	100 m	100 m
Circuit breaker type/size	Type C/max 20A	Type C/max 20A	Type C/max 20A
Braid coverage	80%	80%	80%
Min. bending radius	10 mm	10 mm	10 mm
Max. exposure temperature	65°C	65°C	85°C
Max. exposure temperature (power on)	85°C	85°C	90°C
Legionella thermal shock	No	No	Yes


COMPATIBLE COMPONENTS AND CONTROLS

Components	Rayclik connection kits	Rayclik connection kits	Rayclik connection kits
Control units	HWAT-T55	ACS-30 HWAT-ECO HWAT-T55	ACS-30 HWAT-ECO HWAT-T55
Approvals / Certifications	BS / ÖVE / VDE / SEV / CSTB / SVGW / DVGW / CE / VDE	BS / ÖVE / VDE / SEV / CSTB / SVGW / DVGW / CE / VDE	BS / ÖVE / VDE / SEV / CSTB / SVGW / DVGW / CE / VDE

THERMAL OUTPUT RATING

HWAT - R	
HWAT-M	
HWAT-L	

HEATING CABLE POWER OUTPUT

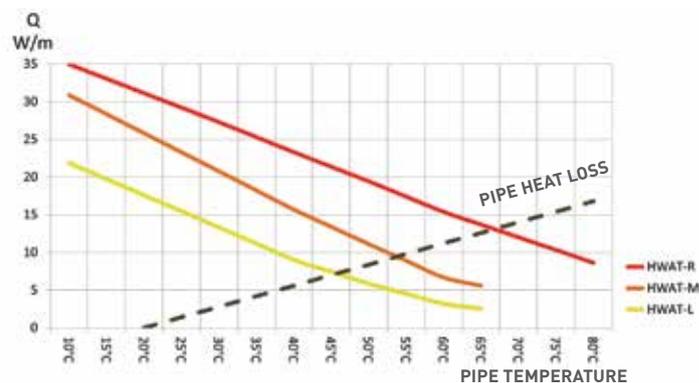

MAXIMUM CIRCUIT LENGTH IN METERS BASED ON START-UP TEMP +12°C , AC 230 V

	Voltage	Max. circuit length			
Circuit breaker size		10 A	13 A	16 A	20 A
HWAT-L	230 V	80 m	110 m	140 m	180 m
HWAT-M	230 V	50 m	65 m	80 m	100 m
HWAT-R	230 V	50 m	65 m	80 m	100 m

Pentair requires the use of a 30mA residual current device (RCD) to provide a maximum safety and protection from fire. All heating circuits have to be protected by C-type circuit breaker.



WWW.PENTAIRTHERMAL.COM

UNITED KINGDOM

Tel: 0800 969 013
Fax: 0800 968 624
salesthermalUK@pentair.com

IRELAND

Tel: 1800 654 241
Fax: 1800 654 240
salesIE@pentair.com

AUSTRALIA

Tel: +61 2 97920250
Fax: +61 2 97745931
sales.thermal@pentair.com

INDIA - NOIDA

Tel: +91 120 464 9500
Fax: +91 120 464 9548
PTMinfome@pentair.com

INDIA - MUMBAI

Tel: +91 22 6775 8800/01
Fax: +91 22 2556 1491
PTMinfome@pentair.com

UAE

Tel: +971 4 378 1700
Fax: +971 4 378 1777
PTMinfome@pentair.com

SOUTH EAST ASIA

Tel: +65 67685800
Fax: +65 67322263
sales.thermal@pentair.com

Pentair is owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2015 Pentair.

