


## Electronic controller for snow- and ice-melting on roof & gutters

### PRODUCT OVERVIEW

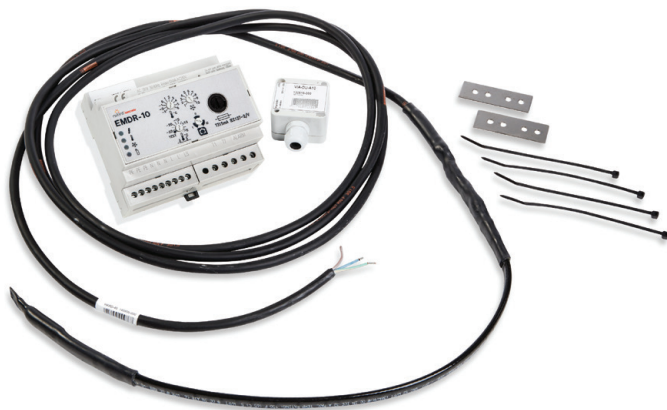

The nVent RAYCHEM EMDR-10 controller is designed for operation with the nVent RAYCHEM heating cables for roof & gutters.

Depending on outdoor temperature and moisture in the gutter, the heating cable will only be switched on if necessary to ensure a correct drain of the melting water.

### FEATURES

- Easy set-up and programming of the unit
- Operates heating cables by temperature and moisture monitoring
- 2 sensors (ambient and moisture sensor)
- Saves up to 80% energy; using energy savings modes based on Proportional Ambient Sensing Control (PASC) algorithm for enhanced energy savings
- Max. switching current 10 A (otherwise switch via power contactor)
- Alarm relay with change over contact to signal unit or sensor problems
- DIN Rail mountable in panels

### GENERAL

Area of use: Non-hazardous locations; for nVent RAYCHEM heating cables.

### TECHNICAL DATA

#### Control Unit

Supply voltage	230 VAC, ±10%, 50Hz
Power consumption	max. 4 VA
Max. switching capacity	I <sub>max</sub> 10(4)A / 230 VAC, SPST, potential 230 VAC
Temperature set points	-3°C to +6°C (factory setting +2°C)
Lower limit temperature range	-25°C to -5°C (factory setting -15°C) and test
Operating differential	±0.5 K
Measuring accuracy	±1.5 K
Moisture adjustment range	1 (max. sensitivity) to 10 (min. sensitivity) (factory setting 5)
Post heating time	60 minutes (only in temperature range < +1,5°C) energy saving selectable
Alarm relay	I <sub>max</sub> 2(1)A / 230 VAC, SPDT, potential-free
Moisture sensor (output)	230 VAC with fuse 5 x 20mm T 315mA (included) according to IEC127-2/V

## TECHNICAL DATA


Mounting	DIN rail according to DIN EN 50022-35
Low voltage directive	EN 60730 EMC EN 50081-1 (emission) and EN 50082-1 (immunity)
Terminals	2.5 mm <sup>2</sup> (stranded conductors), 4 mm <sup>2</sup> (solid conductors)
Protection class	II (panel mounted)

### Enclosure

Ambient temperature range*	0°C to +40°C
Ingress protection	IP20
Housing material	Noryl (self-extinguishing according to UL 94 V-0)
Dimensions	106 x 90 x 58 mm

\* Continuous operation must be assured and the device must be protected from the penetration of moisture.


## AMBIENT TEMPERATURE SENSOR (VIA-DU-A10)

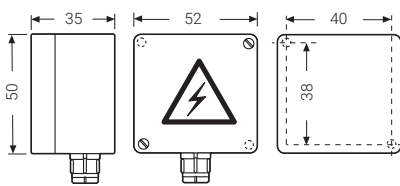

PG9 (Dimensions in mm)

Sensor Type	PTC
Ingress protection	IP54
Terminals	max. 2.5 mm <sup>2</sup>
Sensor cable	2 mm <sup>2</sup> x 1.5 mm <sup>2</sup> max. 100 m (not included)
Exposure temperature	-30°C to +80°C
Mounting	Wall mounting


## MOISTURE SENSOR (HARD-45)



(Dimensions in mm)



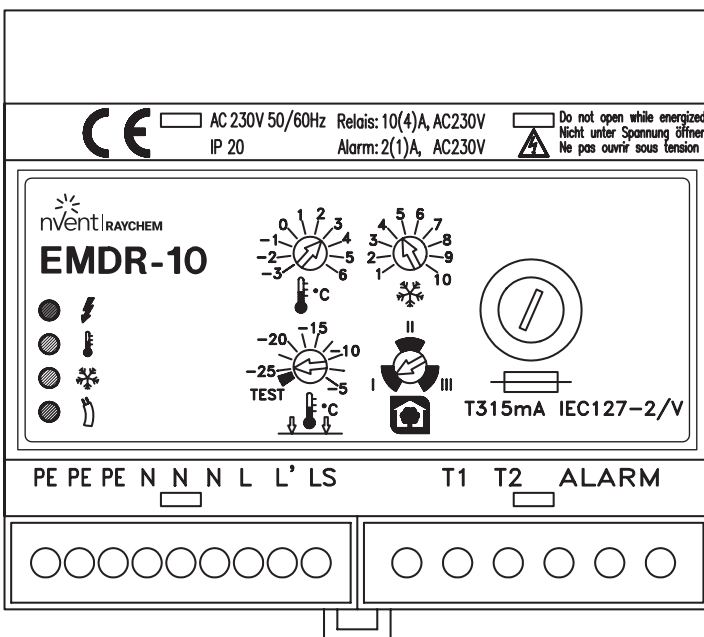

Sensor Type	PTC
Arrangement	0.5 m to 0.8 m flat cable
Power consumption	9 W to 18 W
Ambient temperature range	-30°C to +65°C continuous
Supply voltage	230 VAC, ±10%
Connection cable	3 x 1.5 mm <sup>2</sup> , 4 m pre-assembled extendable to max. 100 m at 3 x 1.5 mm <sup>2</sup>

## MODULE LAYOUT




### Display Elements

The LEDs indicate following operating conditions:

-  **LED green**  
Device in operation (mains voltage).
-  **LED yellow**  
Temperature setpoint  
Adjusted air temperature threshold fallen below.  
LED flashes in case of fault at the air temperature sensor (break or short circuit).
-  **LED yellow**  
Moisture sensitivity  
Adjusted moisture threshold exceeded.  
LED flashes in case of fault at the moisture sensor (break) or fuse blown.
-  **LED red**  
Heating cable energized.

## DIMENSIONS

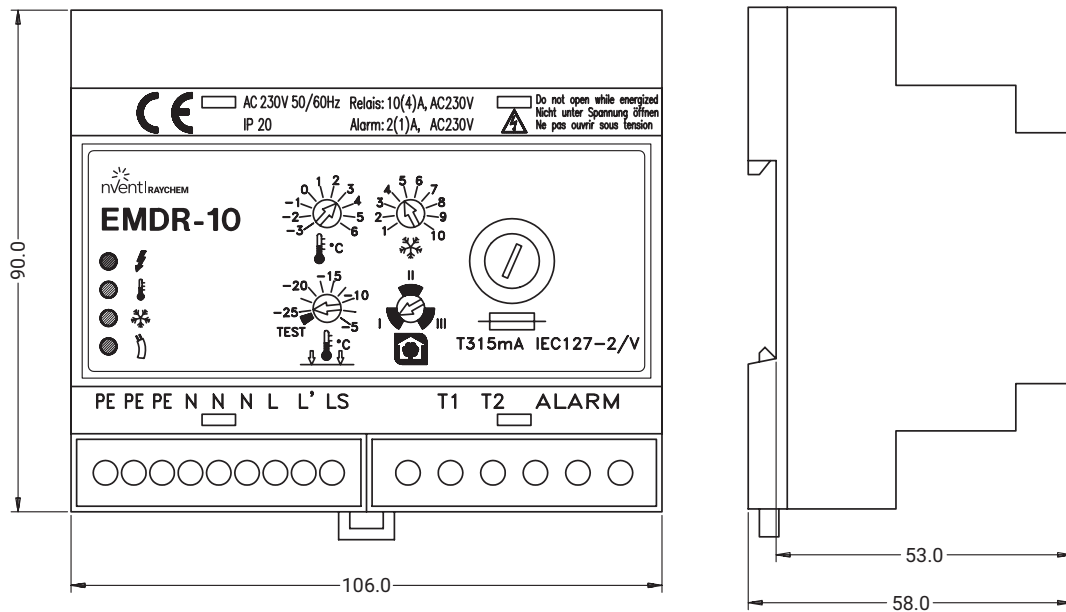

## ELECTRICAL SCHEME


- The length of the heating cable determines the number and size of the circuit breakers.
- The use of a RCD (30 mA) is required by the manufacturer.
- Local standards for electrical connection must be observed.
- The device may only be connected up by an authorized electrician.
- Use C-characteristic circuit breaker!

### Maximum heating cable length for $-10^{\circ}\text{C}$ start-up temperature at 230 VAC

Heating cable	GM-2X / GM2-XT	Frostop-Black
6 A (directly connected)	25 m	30 m
10 A (directly connected)	40 m	50 m
13 A (with contactor)	50 m	65 m
16 A (with contactor)	60 m	80 m
20 A (with contactor)	80 m	-


## EMDR-10 WITH DIRECTLY CONNECTED HEATING CABLE

Attention: max. heating cable length 40 m, circuit breaker max. 10A (C-characteristic)

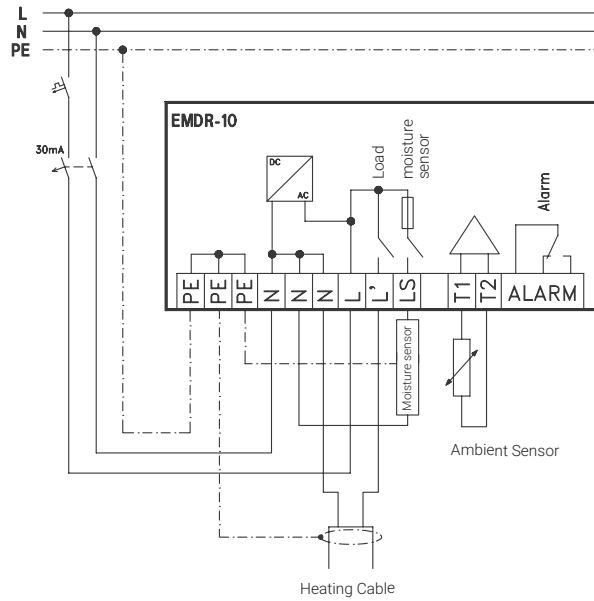

## EMDR-10 WITH CONTACTOR

Attention: circuit breaker for EMDR-10 max. 10A

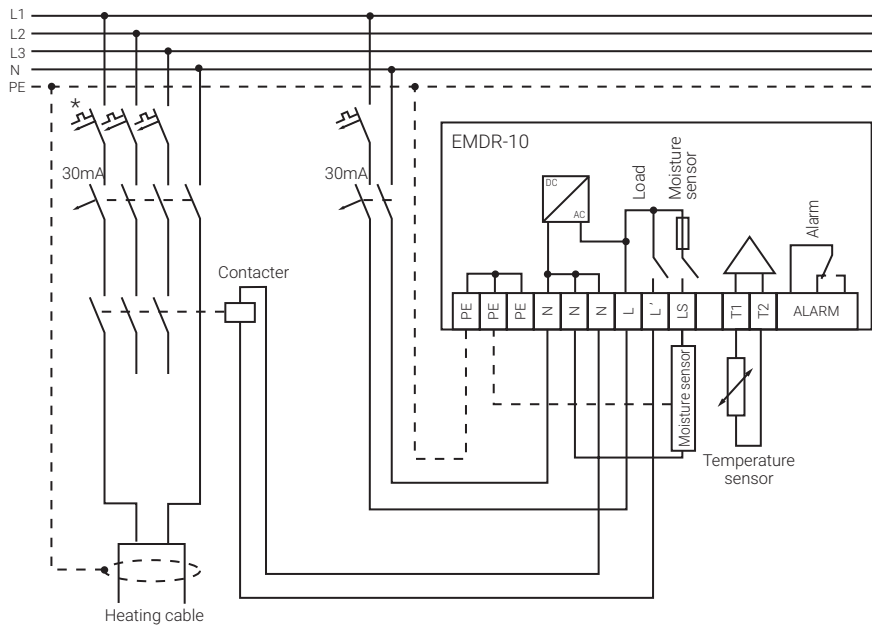

## APPROVALS

Approvals	CE, ROHS, WEEE
Electromagnetic Compatibility (EMC)	EN 61000-6-1: 2007; EN 61000-6-3:2007 + A1:2011

## ORDERING DETAILS

Catalog number	EMDR-10
Part number	449554-000
Weight	350 g
In package	Control unit, Din-rail, 1 ambient sensor VIA-DU-A10, 1 moisture sensor HARD-45

**Europe, Middle East, Africa**

Tel +32.16.213.511  
Fax +32.16.213.603  
info@nVent.com

**Asia Pacific**

Tel +86.21.2412.1688  
Fax +86.21.5426.3167  
info@nVent.com



Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**