


HWAT-ECO V5



RAYCHEM

ELECTRONIC CONTROLLER FOR HOT WATER TEMPERATURE MAINTENANCE SYSTEMS

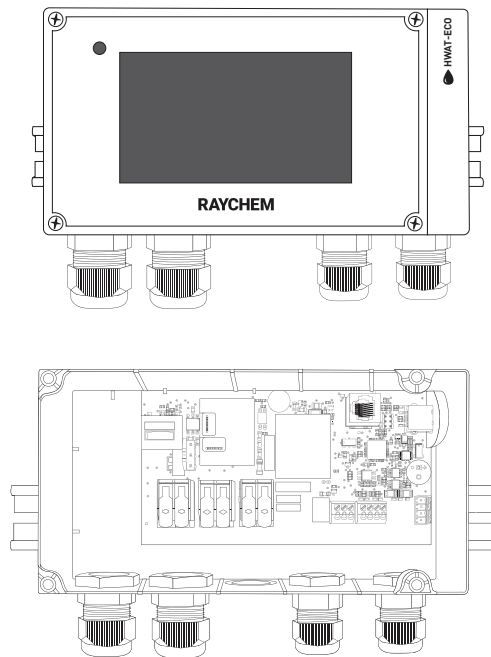

PRODUCT OVERVIEW

The nVent RAYCHEM HWAT-ECO controller is designed for operation with the nVent RAYCHEM HWAT-L, -M and -R self-regulating heating cables.

FEATURES

- Intuitive set-up and programming of the unit by a 5" inch colour touch screen
- Flexible temperature control of hot water temperature maintenance systems
- Energy savings through an integrated function that lowers the maintain temperature during hours of low water consumption
- Heat-up cycle function that increases the water temperature of the hot water in the pipes
- Alarm relay with change over contact to signal power, temperature or communication problems
- Hot water storage & pipe temperature monitoring with high and low temperature alarm and system shut down.
- Seven pre-defined building timer programmes that can be customized by the user
- Pre-set up in power-off mode by external power bank/charger via USB connection

GENERAL

Area of use Non-hazardous locations; for HWAT -L/ -M / -R heating cables only


ELECTRICAL PROPERTIES

Supply Voltage	230VAC (+10/-15%),50Hz
Operating temperature	0°C to 40°C ambient
Power consumption	2,5 VA max
Switching capacity output relay	20 A 230 VAC
Size Power supply terminals	3 x 6 mm ² max.
Size Heating cable terminals	3 x 6 mm ² max.
Size Alarm terminals	3 x 1,5 mm ² max.
Size Sensor terminal - Boiler	2 x 1,5 mm ² max.
Size Sensor terminal - Pipe	2 x 1,5 mm ² max.
Alarm relay	Single pole double throw relay, volt-free; rating 2A / 250VAC
Circuit breaker	Max. C 20 A (C-Characteristics)
Real time clock	Automatic Summer/ Winter time and leap year correction
Clock back-up time	10 days
Clock accuracy	+/-10 minutes per year
Keylock	Password protection for parameter settings
USB Port	For pre-setup in power off mode; for firmware upgrades

ENCLOSURE

Dimensions	210 mm x 90 mm x 85 mm
Ingress protection class	IP54 – indoor use only
Enclosure material	Polycarbonate
Mounting option	Mountable DIN RAIL, 35 mm
Cable entries	2 x M25 and 2 x M20 (1 Blanking plug for 2nd. M20)
Storage temperature	-20 °C to +50°C
Flammability class	DIN EN 60730/VDE 0631-1
Weight	990 g

TYPICAL ENCLOSURE DIMENSIONS AND MODULE LAYOUT



1. Touch screen: size 5" resistive
2. LED Green: Power to heating cable
Blinking: Error/Warning message
3. M25 Gland: Power cable
4. M25 Gland: Heating cable
5. M20 Gland: Sensor Hot water storage/Sensor Pipe/external alarm

PROGRAMMING

Selectable temperatures	37°C up to 65°C in 24 blocks of 1 hour per day
Default programmes	7 built-in building specific programmes, editable
Timer	Programme can be modified in steps of one hour. Following operation modes are selectable: OFF, ECONOMY, MAINTAIN and HEAT-UP CYCLE

SENSOR

Temperature sensor type	NTC 2 KOhm / 25°C, 2-wire
Sensor tip dimensions	Ø 5 mm; length 20 mm
Sensor cable length	3 m; cable extension up to 100 m, cross section extension cable: 2 x1,5 mm ²
Temperature range	-20°C to 90°C

Sensor data	Temperature	Resistance
	40°C	1211 Ohm
	45°C	1033 Ohm
	50°C	8854 Ohm
	55°C	762 Ohm
	60°C	658 Ohm
	65°C	571 Ohm

MONITORING

Boiler temperature alarm	High temperature alarm/cut	Adjustable range: maintain temperature to 66°C or OFF
	Low temperature alarm /cut	Adjustable range: maintain temperature to 37°C or OFF
Pipe temperature alarm	High temperature alarm/cut	Adjustable range: maintain temperature to 66°C or OFF
	Low temperature alarm /cut	Adjustable range: maintain temperature to 37°C or OFF
Sensor alarm	Sensor open circuit Sensor short circuit	
Heating cable connection	Heating cable open circuit Heating cable short circuit	


MEMORY

Parameters	All parameters are stored in nonvolatile memory, except date and time
Clock back-up time	10 days

APPROVALS

Approvals	CE, VDE, RHOS, WEEE
Electromagnetic Compatibility (EMC)	Complies to EN 5014-1 for emission and EN 50730-1 for immunity

ELECTRICAL SCHEME

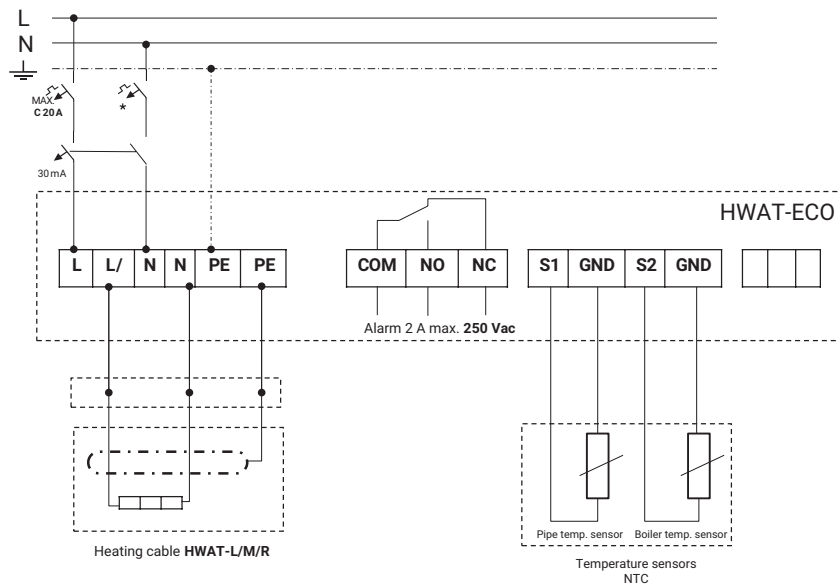

ORDERING DETAILS

Catalog number	HWAT-ECO
Part number	1244-019897
Weight	990 g
In package	Control unit, Din-rail, 1 Line sensor

ACCESSORY

Catalogue description	Pipe sensor	Power bank
Part number	1244-015847	1244-020365

Important: The Raychem HWAT-ECO controller is for use with the Raychem HWAT- heating cables only. The warranty and system listing will be invalidated if the HWAT-ECO controller is used with other heating cables.

United Kingdom

Tel: 0800 969 013
Fax: 0800 968 624
salesthermalUK@nvent.com

Ireland

Tel: 1800 654 241
Fax: 1800 654 240
salesIE@nvent.com

South East Asia

Tel: +65 67685800
Fax: +65 67322263

Australia

Tel: +61 2 97920250
Fax: +61 2 97745931

India - Noida

Tel: +91 120 464 9500
Fax: +91 120 464 9548
NTMinfome@nvent.com

India - Mumbai

Tel: +91 22 6775 8800/01
Fax: +91 22 2556 1491
NTMinfome@nvent.com

UAE

Tel: +971 4 378 1700
Fax: +971 4 378 1777
NTMinfome@nvent.com



nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER